Manualslib.com - The Global Manuals Library

SONY FW-43BZ35F INSTALLATION MANUAL

Table of Contents

Models covered by instruction
Ethernet connection
How to do a “Factory Reset”
Initial Installation
Screen Settings
General Settings
Important
Disable Pro settings
NICE TO KNOW
TV software version
Changing network type
Other ManualsLib Projects

SONY BRAVIA PROFESSIONAL ANDROID SIGNAGE DISPLAY INSTALLATION MANUAL

1 INSTALLATION INSTRUCTIONS

1.1 Models covered by instruction

FW-43BZ35F
FW-49BZ35F
FW-55BZ35F
FW-65BZ35F

FW-85BZ40H
FW-75BZ40H
FW-65BZ40H
FW-55BZ40H

1.2 Ethernet connection

Use the LAN port to connect the TV to your network.

1.3 How to do a "Factory Reset"

Note: If the TV has not been set up before, the TV will power on in the" Install menu", shown below. The factory reset can then be skipped.

Alternative 1:

- From home menu open settings in the top right corner of the screen.
- Storage & reset – Factory reset data
    - Erase everything
    - TV will now reboot
- Do a normal installation of the screen

Alternative 2:

- Unplug the TV AC power cord from the electrical socket.
- Simultaneously press and hold down the Power and volume Down buttons on the TV (not on the remote), and then (while holding the buttons down) plug the AC power cord back in. Continue to hold the buttons down until the green LED light appears.
- It will take approximately 10-30 seconds for the LED light to turn green.
- Release the buttons after the green LED light appears.

- After some time, the TV will reboot two times and the Welcome setup screen will appear.

If the white LED light doesn't turn green within 30 seconds, start over again.

1.4 Initial Installation

1.4.1 Screen settings

- Power On TV
- Welcome: Select language
- Setup your TV with an Android phone or tablet: **Skip**
- Make the most of your TV (sign into Google account): **Skip**
- Terms of service: **Accept**
- Location: **No**
- Help improve Android performance: **No**
- Choose a name for your device: The one that describes the model number of the display (i.e: FW-43BZ35F)
- Bravia Privacy Policy: scroll down to the bottom with the down arrow on remote and select: **Agree**
- Specify how your TV is positioned: Table-Top stand or Wall mount, select what applies to your TV
- Change current date and time: **Change** if date and time is incorrect, or else choose **Skip**
- Setup Completed: **Complete**

- Welcome to Android TV: following is a slideshow guide. To continue press the right arrow on your remote until you can select **DONE**
- Follow the **General Settings** described in **2.4.2**

1.4.2 General Settings

To start we need to activate Pro settings

- From main TV menu: select Pro mode tool – Pro settings mode: **OK**
- Wait for TV to reboot
- TV should now display a blue bar in the top of the screen with the text "Pro settings in process"

  Now open settings located in the top right corner of the screen.
- To turn off sound feedback:
  - Sound – System sounds: **turn off**
- To turn off eco settings:
  - Power – Eco: turn all options **OFF**

On your computer go to this url: https://a.dsig.tv/ and download the Android file and place this in the root folder on a USB stick and insert into the back of the TV.
NOTE: Do not import data if asked.

Go to the top and select Settings and then select Pro settings

- Allow Pro Mode to access photos, media and files on your device: **Allow**
- Allow NodeRuntimePrivilege to access photos, media and files on your device: **Allow**
- Allow NodeRuntimeNormal to access photos, media and files on your device: **Allow**
- Allow WebAppRuntime to access photos, media and files on your device: **Allow**

- In Pro settings: Install APK – select application installer file (i.e: AndroidDS.apk)

1.
    - Select Install
    - After installation is done select Open

The signage app should now open and display the install code

- Access the signage management portal.
- Select add screen.
- Enter the Install Code presented on the screen.

After installation is completed, unplug the USB stick.

1.4.3 IMPORTANT

To get the TV to auto-start signage application you must activate this in the signage management portal.
When TV shows up in the signage management portal, open settings for this screen with the settings wheel when hovering mouse over the screen.

- Open Actions – Player setup – Android – Autostart – Enable
  - A message on the screen should display showing "Enabling app autostart"

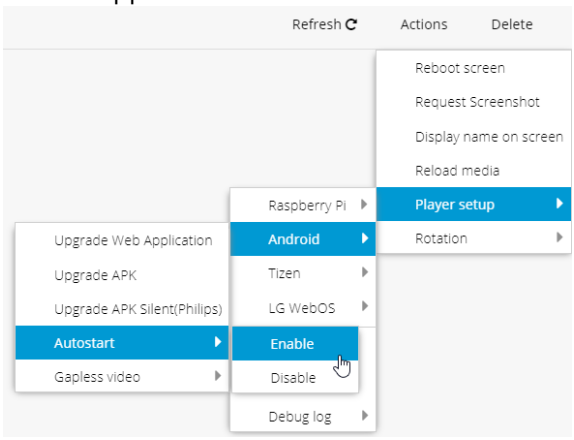

  - Confirm that this is enabled in the portal by clicking on refresh and the second lowest field should be: Android Autostart: enabled

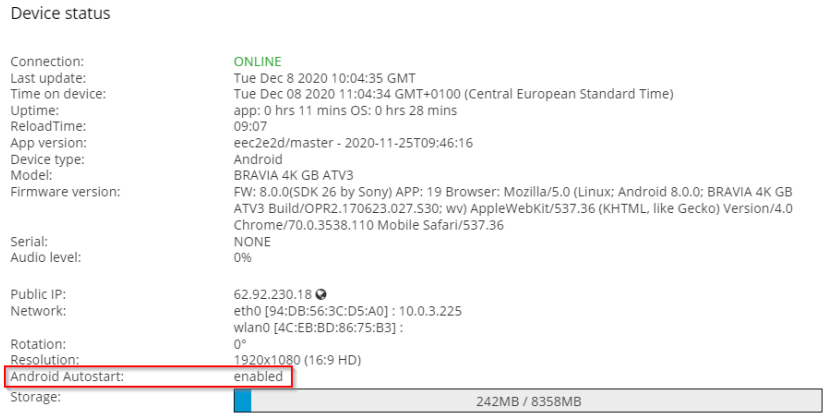
Device status
Connection: ONLINE
Last update: Tue Dec 8 2020 10:04:35 GMT
Time on device: Tue Dec 08 2020 11:04:34 GMT+0100 (Central European Standard Time)
Uptime: app: 0 hrs 11 mins OS: 0 hrs 28 mins
ReloadTime: 09:07
App version: eec2e2d/master - 2020-11-25T09:46:16
Device type: Android
Model: BRAVIA 4K GB ATV3
Firmware version: FW: 8.0.0(SDK 26 by Sony) APP: 19 Browser: Mozilla/5.0 (Linux; Android 8.0.0; BRAVIA 4K GB ATV3 Build/OPR2.170623.027.S30; wv) AppleWebKit/537.36 (KHTML, like Gecko) Version/4.0 Chrome/70.0.3538.110 Mobile Safari/537.36
Serial: NONE
Audio level: 0%
Public IP: 62.92.230.18
Network: eth0 [94:DB:56:3C:D5:A0] : 10.0.3.225
wlan0 [4C:EB:BD:86:75:B3] :
Rotation: 0°
Resolution: 1920x1080 (16:9 HD)
Android Autostart: enabled
Storage: 242MB / 8358MB

1.4.4 Disable Pro settings

After the TV have been connected to the Signage management portal press the HOME button on the remote to come back to the TV main menu.
Open settings in top right corner – Pro settings – Change to normal mode: **OK**

- Wait for TV to reboot
  The TV should not display the blue bar with "Pro settings in process" anymore.
  After Reboot the signage app will start after a short while.

2 NICE TO KNOW

2.1 TV software version

Use the Sony TV control and press the Home button
Select Settings in top right corner and open About.

2.2 Changing network type

Use the Sony TV control and press the Home button
Select Settings in top right corner

- Network – Network setup – Easy
    - Wired LAN – Connected successfully: **OK**
    - Wi-Fi – Connect by scan list
        - Select SSID
        - Enter password
        - OK

Other ManualsLib Projects

www.manualslib.com

www.manualslib.de

www.manualslib.es

www.manualslib.fr

www.manualslib.nl

www.manualslib.mx

www.manualslib.tech 30+ Languages